

RM-GW-ETH



Performance features


- + Remote maintenance of CPS-M or RZN (ACN-BI501-USB with ACN-CM501) via USB
- + Automatic firmware updates of the gateway
- + 2 digital inputs for fault, alarm or remote access release
- + Connection via USB A-B cable
- + Central administration and control via the D+H Software SCS
- + Power supply possible via SHEV control panel
- + E-mail notification in case of malfunction or alarm, individually adjustable per device

Technical data

RM-GW-ETH

W x H x D	107 x 95 x 58 mm
Diameter	mm
Weight	0.18 kg
Art. No.	30.555.30

Example of application

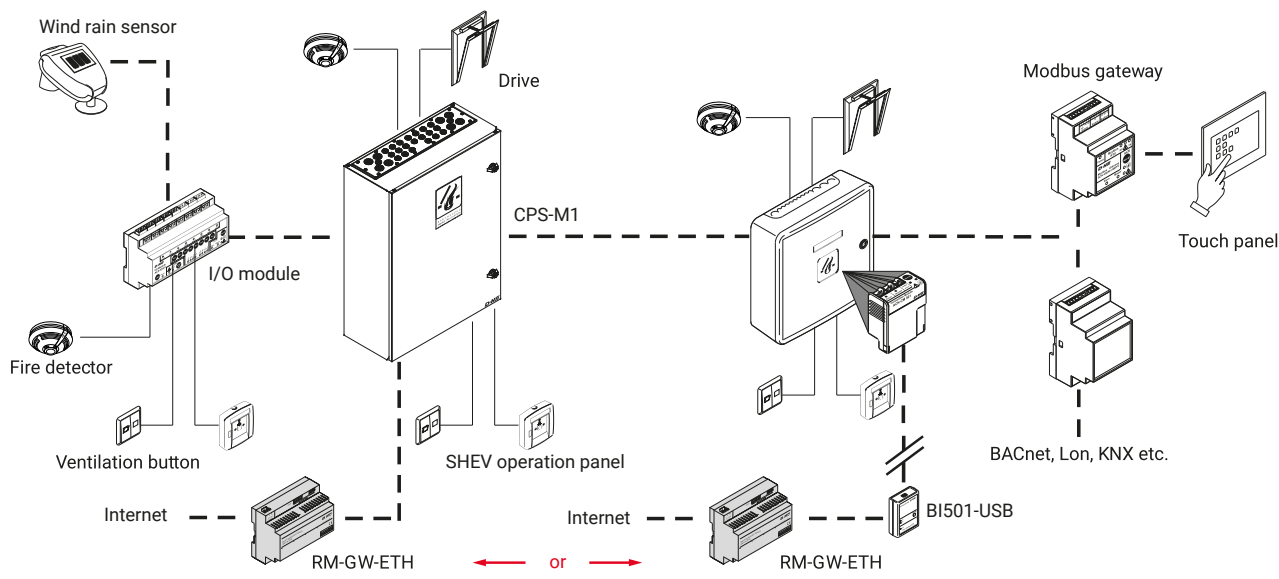

We reserve the right to make changes
Source: www.dh-partner.com, Status: 10.09.2024