


RZN 4404-M

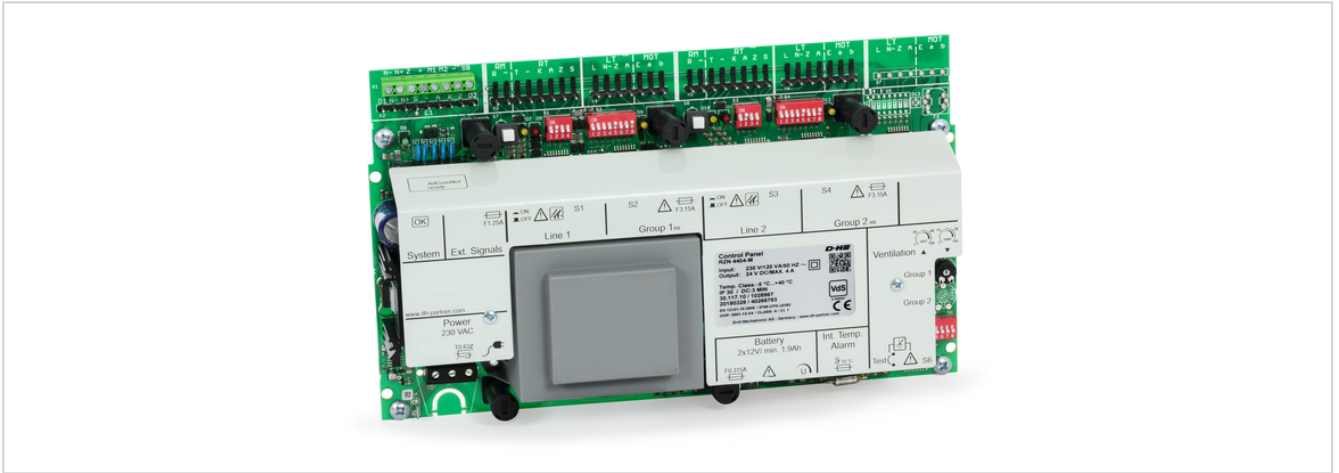

Performance features

- + Compact SHEV control panel - AdComNet ready
- + Tested and certified according to ISO 21927-9, VdS 2581, VdS 2593, VdS 2344 and DIN EN 12101-10, fulfils the building authority requirements in accordance with DIN 18232-9
- + Up to 4 A total drive current
- + Stabilised output voltage
- + Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset
- + Option to combine SHEV / building alarm function
- + Integrated comfort functions for daily natural ventilation
- + Optional connection to rain detectors or wind / rain sensors without an additional module
- + Connection of up to 8 SHEV operation panels and 14 fire detectors per line (Only detectors permitted by D+H may be used)
- + Min. 72 hr battery backup supply

Approvals / Certificates

Find out about permission details from your D+H Partner.



Article also available with the following permissions under other article numbers. Technical data may deviate.



Technical data

RZN 4404-M

Supply	230 V AC / 50 Hz / 120 VA
Stand-by power	6.8 W
Output	24 V DC / 4 A
Ripple	< 2 V _{ss}
Mode of operation monitoring	Continuous duty
Mode of operation Alarm / Ventilation	Short-time duty 30 % duty cycle
Temperature range	-5 °C ... +40 °C
Line / Group	2 / 2
Battery type	Typ 2 (2x)
Weight	2.7 kg
Remark	With alarm devices = Akku Typ 8 (2x)
Art. No.	30.117.10

Batteries must be ordered separately.

Example of application

